

02

HAIR DRYERS

have a great Hair Day!

● Busan, South Korea







HAIR DRYERS

Public use hair dryers, especially designed for facilities with high traffic or individual use hair dryers.

- Large variety of hair dryers in different designs, finishes and performances.
- The public use hair dryers are robust, reliable and especially designed to work in areas with high or very high traffic, such as sports facilities, swimming pools, children's play areas, campings, etc. They incorporate all the relevant safety and vandal proof measures for trouble-free operation in these high traffic areas.
- The individual use hair dryers are quiet, with a powerful flow of air and a long useful life. Compact and balanced models thanks to their light weight, direct current motors. Designed for use in hotel rooms, hospitals, old people's homes, etc. these hair dryers have a speed regulator that allows the best drying function to be chosen at any given time.



HAIR DRYERS

public use / push-button



SC0088H

material: **steel**
finish: **white enamelled coating**



SC0088HCS

material: **steel**
finish: **satin chrome**



SC1088HT

material: **steel**
finish: **white enamelled coating**



SC1088HTCS

material: **steel**
finish: **satin chrome**



These models are also available with a white cast iron cover: SC0085H · SC1085HT

SC0088H · SC0088HCS · SC1088HT · SC1088HTCS COMPONENTS AND MATERIALS

- Weld-free cover fixed to the base with two vandal-proof lock screws and a special saniflow key®
- 3 mm thick aluminium base
- Fire resistant plastic UL 94-VO fan scroll
- Class F universal motor incorporating a safety
- Aluminium centrifugal double symmetrical inlet fan wheel
- Heating element protected by a safety thermal cut-off
- Nozzle in chrome-plated zamak®
- Zamak® chrome-plated button activates an electro-mechanic timer with a 90-second cycle

SC0088H · SC00HCS

- 360° revolving nozzle

SC1088HT · SC1088HTCS

- Extendable white polyurethane tube
- PBT thermoplastic air nozzle

SC0088H · SC0088HCS · SC1088HT · SC1088HTCS TECHNICAL SPECIFICATIONS


| | |
|------------------------|-------------|
| Voltage | 220 - 240 V |
| Frequency | 50 / 60 Hz |
| Electrical Isolation | Class I |
| Motor power | 250 W |
| r.p.m. | 5500 |
| Cover thickness | 1.5 mm |
| Sound pressure (at 2m) | 70 dBA |

SC0088H · SC0088HCS


| | |
|-----------------------|---------|
| Total power | 2,250 W |
| Consumption | 10 A |
| Weight | 5.9 Kg |
| Heating element power | 2,000 W |
| Air temperature | 53°C |

SC1088HT · SC1088HTCS

| | |
|-----------------------|---------|
| Total power | 1,000 W |
| Consumption | 4.5 A |
| Heating element power | 750 W |
| Air temperature | 40°C |

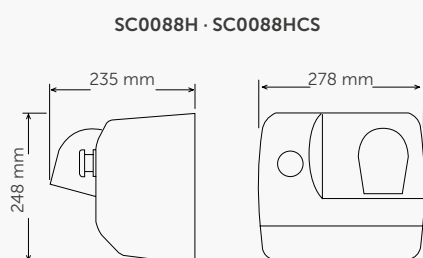

SC1088HT · SC1088HTCS

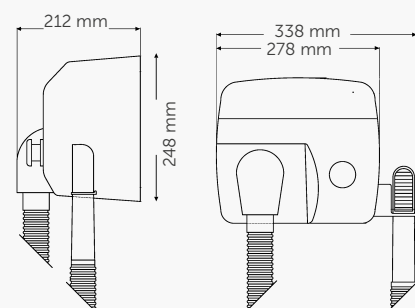

HAIR DRYERS

public use / automatic



SC0009

material: **stainless steel**
finish: **white epoxy**




SC0009CS

material: **stainless steel**
finish: **satin**




SC0009 · SC0009CS COMPONENTS AND MATERIALS

- One-piece weld-free cover
- Turns on automatically on unhooking the handle
- Class F high pressure universal brush motor
- Maximum air velocity: 205 Km/h
- Motor power is adjustable, allowing electricity consumption to be regulated
- Heating element protected by a safety thermal cut-off.
- Extendable white polyurethane tube.
- Connector piece of the dryer with the tube made of PBT thermoplastic.
- Handle and handle support made in ABS
- The base includes four silent-blocks to cushion mechanical vibrations
- PA6 V0 internal set
- Disconnects automatically after 60 seconds of continuous use

SC0009 · SC0009CS TECHNICAL SPECIFICATIONS

| | |
|--|-------------------------|
| Voltage | 220-240 V |
| Frequency | 50 - 60 Hz |
| Electrical Isolation | Class I |
| Total power | 200 - 1,00 W |
| Consumption | 2.4 - 5.2 A |
| Motor power | 200 - 400 W |
| rpm | 14,000 - 19,000 |
| Heating element power | 0-600 W (on/off switch) |
| Weigth | 5.6 Kg |
| Air velocity | 140 - 205 Km/h |
| Air temp. (d=10 cm and room temp=21°C) | 45°C |
| Sound pressure (at 2m) | 65-73 dBA |
| Length of the hose | 800-2,000 mm |
| Protection rating | IP23 |

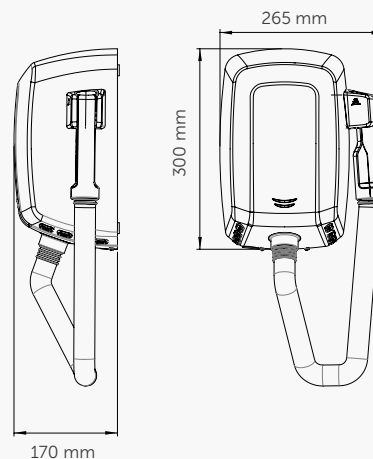

HAIR DRYERS

individual use / automatic



SC0004

material: **ABS**
finish: **white**



SC0087

material: **polycarbonate**
finish: **white**



SC0088

with shaver sockets

material: **polycarbonate**
finish: **white**



SC0004 · SC0087 · SC0088 COMPONENTS AND MATERIALS

SC0004 · SC0087 · SC0088

- The heating element includes a safety thermal cut-off
- Turns on automatically on unhooking the hand piece
- White ABS thermoplastic handle. With internal thermal reinforcement; there is no danger if the hand piece falls into water

SC0004

- PBT thermoplastic casing
- Class B brush motor incorporating a safety thermal cut-off
- PP UL94-V0 helicoidal fan wheel
- Extendable white polyurethane tube. Fixed to rotating bearings that prevent it from rolling back on itself

rings that prevent it from rolling back on itself

SC0087 · SC0088

- Weld-free housing in self-extinguishing polycarbonate UL 94 V Ø
- DC motor, includes a thermal overload switch
- Thermoplastic axial turbine
- Heating element incorporates safety thermal cut-off
- Extendable white polyurethane tube
- Speed selector with three settings

SC0088

- Two sockets for shaver, 115 or 220 V

SC0004 · SC0087 · SC0088 TECHNICAL SPECIFICATIONS

SC0004 · SC0087 · SC0088


| | |
|--|------------------|
| Voltage | 220-240 V |
| Frequency | 50 / 60 Hz |
| Electrical Isolation | Class II |
| Air temp. (d=10 cm and room temp=21°C) | 50°C |
| Installation height | 1,300 - 1,500 mm |

SC0087 · SC0088

| | |
|-------------------------|---------------------------------------|
| Total power | 600 - 1,100 W |
| Consumption | 2.6 A - 5.2 A |
| Motor power | 60 W |
| r.p.m | 4,000 - 5,000 |
| Cover thickness | 1.5 mm |
| Effective airflow | 65 m ³ / h (1,080 l / min) |
| Air velocity | 55 Km / h |
| Sound pressure (at 2 m) | 68 dBA |
| Protection rating | IP20 |
| Tube lenght | 550 - 1,800 mm |

SC0004

| | |
|-------------------------|-------------------------------------|
| Total power | 850 W |
| Consumption | 3 A |
| Motor power | 150 W |
| r.p.m | 15,000 |
| Heating element power | 700 W |
| Cover thickness | 3 mm |
| Effective airflow | 40 m ³ / h (667 l / min) |
| Air velocity | 79 Km / h |
| Sound pressure (at 2 m) | 69 dBA |
| Protection rating | IP23 |
| Tube lenght | 800 - 2,000 mm |

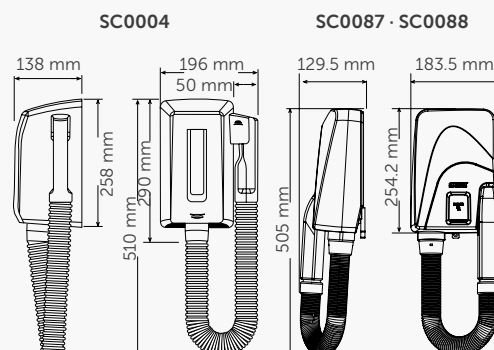

HAIR DRYERS

individual use / push - button



SC0010

material: **ABS**
finish: **white**



SC0010CS

material: **ABS**
finish: **black**



SC0020

material: **ABS**
finish: **white**



SC0020CS

material: **ABS**
finish: **black**



Exclusive individual use bathroom wall mounting hair dryers with a functional, robust and trendy design that blends into any space perfectly such as hotels, hospitals or elderly care centers.


SC0010 · SC0010CS · SC0020 · SC0020CS COMPONENTS AND MATERIALS

- Hairdryer with on / off switch and polypropylene flow-direction nozzle
- Heavy-duty 650-1800 mm coiled power cord
- Plug with 1,000 mm power cord
- ABS wall support
- Speed selector (two settings)
- The motor incorporates a safety thermal cut-off
- Polycarbonate turbine


SC0010 · SC0010CS · SC0020 · SC0020CS TECHNICAL SPECIFICATIONS

| | |
|---|---------------------------------------|
| Voltage | 220 - 240 V |
| Frequency | 50 / 60 Hz |
| Electrical Isolation | Class II |
| Total power | 540 - 1,240 W |
| Consumption | 2.7 - 4.9 A |
| Motor power | 40 W |
| r.p.m. | 1,1000 - 1,3000 |
| Heating element power | 1,200 W |
| Weight | 0.7 Kg |
| Effective airflow | 73 m ³ / h (1,217 l / min) |
| Air velocity | 54 Km / h |
| Air temperature (10 cm distance / 21°C) | 61°C |
| Sound pressure (at 2m) | 60 dBA |
| Installation height | 1,300 - 1,500 mm |
| Cable lenght | 610 - 1,800 mm |

SC0010 · 10CS

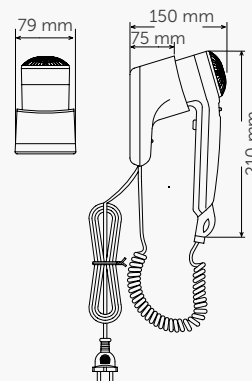

SC0020 · SC0020CS

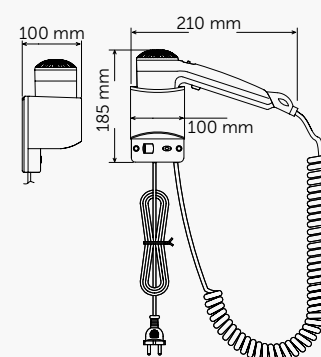

HAIR DRYERS

individual use / push - button




SC0030
with shaver sockets

material: **ABS**
finish: **white**



SC0030CS
with shaver sockets

material: **ABS**
finish: **black**

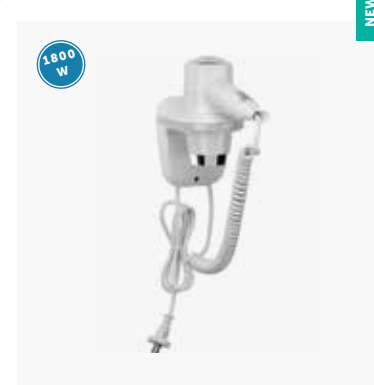

SC0040

material: **ABS**
finish: **white**



Exclusive individual use bathroom wall mounting hair dryers with a functional, robust and trendy design that blends into any space perfectly such as hotels, hospitals or elderly care centers.


SC0030 · SC0030CS · SC0040 COMPONENTS AND MATERIALS

- Hairdryer with on/off switch and polypropylene air flow nozzle
 - Heavy-duty 650-1,800 mm coiled power cord
 - Plug with 1,000 mm power cord
 - ABS wall support
 - Speed selector (two settings)
 - The motor incorporates a safety thermal cut-off
 - Polycarbonate turbine
- SC0030CS**
- Two sockets for shaver, 115 or 220 V, protected by a transparent plastic box

SC0030 · SC0030CS · SC0040 TECHNICAL SPECIFICATIONS




| SC0030 · SC0030CS | |
|---------------------------------------|------------------------------------|
| Voltage | 220 - 240 V |
| Frequency | 50/60 Hz |
| Electrical Isolation | Class II |
| Total power | 540-1,240 W |
| Consumption | 2.7 – 4.9 A |
| Motor power | 40 W |
| rpm | 11,000-13,000 |
| Heating element power | 1,200 W |
| Weight | 1.3 Kg |
| Effective airflow | 73 m ³ /h (1,217 L/min) |
| Air velocity | 54 Km/h |
| Air temperature (10 cm distance/21°C) | 61°C |
| Sound pressure (at 2m) | 60 dBA |
| Installation height | 1,300–1,500 mm |
| Cable lenght | 610–1,800 mm |

| SC0040 | |
|---------------------------------------|------------------------------------|
| Voltage | 220-240 V |
| Frequency | 50/60 Hz |
| Electrical Isolation | Class II |
| Total power | 200–1,800 W |
| Consumption | 0.9 – 7 A |
| Motor power | 170 W |
| rpm | 9,000 - 18,000 |
| Heating element power | 1,600 W |
| Weight | 0.8 Kg |
| Effective airflow | 80 m ³ /h (1,330 L/min) |
| Air velocity | 60 Km/h |
| Air temperature (10 cm distance/21°C) | 63°C |
| Sound pressure (at 2m) | 68 dBA |
| Protection rating | IP20 |
| Installation height | 1,300–1,500 mm |
| Cable lenght | 610–1,800 mm |

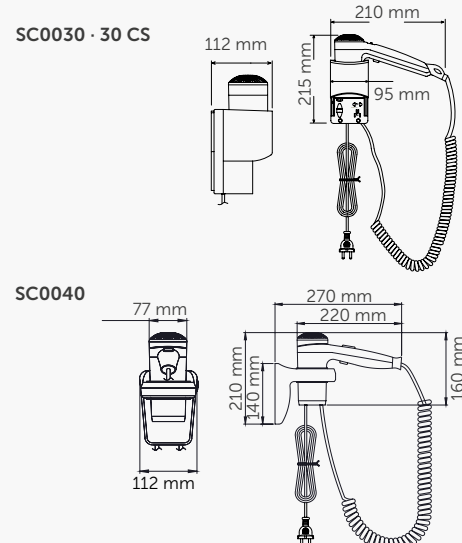

HAIR DRYERS

Table
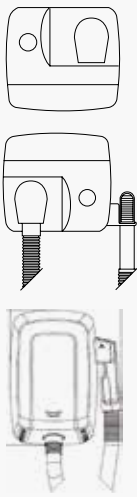
| | MODEL | USE | | OPERATION | | MATERIAL / FINISH | | | | | | |
|---|------------|--------|------------|-----------|----------------|---|--------------------------|--------------------------------------|-------------------------------------|----------------------------------|--------------|--------------|
| | | Public | Individual | Manual | Auto- matic | Steel white porcelain enam- elled | Steel satin chrome | Stainless steel white epoxy | Sainles steel satin chrome | Poly- car- bonate white | ABS white | ABS black |
|  | SC0088H | • | | • | | • | | | | | | |
| | SC0088HCS | • | | • | | | • | | | | | |
| | SC1088HT | • | | • | | • | | | | | | |
| | SC1088HTCS | • | | • | | | • | | | | | |
| | SC0009 | • | | | • | | | • | | | | |
| | SC0009CS | • | | | • | | | | • | | | |
|  | SC0004 | | • | | • | | | | | | • | |
| | SC0087 | | • | | • | | | | | • | | |
| | SC0088 | | • | | • | | | | | • | | |
|  | SC0010 | | • | • | | | | | | | • | |
| | SC0010CS | | • | • | | | | | | | | • |
| | SC0020 | | • | • | | | | | | | • | |
| | SC0020CS | | • | • | | | | | | | | • |
| | SC0030 | | • | • | | | | | | | • | |
| | SC0030CS | | • | • | | | | | | | | • |
| | SC0040 | | • | • | | | | | | | • | |

HAIR DRYERS

Table

| SPEED SELECTOR | OPERATING TIMER | | ADDITIONAL THERMAL CUT-OFF SAFETY COMPONENTS | SOCKET FOR ELECTRIC SHAVER | SUITABLE FOR | | | MODEL |
|----------------|-----------------|-----|--|----------------------------|------------------------|------------------------------|--------------------------------|------------|
| | 90" | 60" | | | Gyms and sport centres | Hospitals and health centres | Hotels and other accommodation | |
| | • | | • | | • | | | SC0088H |
| | • | | • | | • | | | SC0088HCS |
| | • | | • | | • | | | SC1088HT |
| | • | | • | | • | | | SC1088HTCS |
| | | • | • | | • | | | SC0009 |
| | | • | • | | • | | | SC0009CS |
| | • | | • | | | • | • | SC0004 |
| • | • | | • | | | • | • | SC0087 |
| • | | | • | • | | • | • | SC0088 |
| • | | | • | | | • | • | SC0010 |
| • | | | • | | | • | • | SC0010CS |
| • | | | • | | | • | • | SC0020 |
| • | | | • | | | • | • | SC0020CS |
| • | | | • | • | | • | • | SC0030 |
| • | | | • | • | | • | • | SC0030CS |
| • | | | • | | | • | • | SC0040 |